

# High-Power LPDA Antenna Marine Version

800 – 3000 MHz

Product Code: LPDA-A0105

VERSION: 1.2

## SPECIFICATIONS:



<b>Electrical:</b>	
Frequency range	800 – 3000 MHz
VSWR	< 2:1
Nominal input impedance	50 Ω
Feed power handling	500 W CW (1 – 2 GHz) 200 W CW (2 – 3 GHz)
Gain (free space)	12 dBi average
Polarisation	Vertical
Connectors	7-16 female
E-plane beamwidth:	
1 GHz	36°
2 GHz	28°
3 GHz	22°
H-plane beamwidth:	
1 GHz	64°
2 GHz	68°
3 GHz	72°
Front-to-back ratio	> 20 dB
<b>Mechanical:</b>	
Dimensions (l x w x h)	< 720 mm x 80 mm x 470 mm
Material	Aluminium, stainless steel, fibreglass
Total mass	4.5 kg including mounting bracket
<b>Environmental: designed to meet the following specifications</b>	
Wind survival	160 km/h (theoretical)
Temperature range	- 30 °C to + 65 °C
Water and dust resistance	IP65
Corrosion	Appropriate anti-corrosion measures are taken in the design of antenna for harsh environmental conditions

## PRODUCT FEATURES:

- Wideband frequency 800 to 3000 MHz
- VSWR < 2:1
- High gain: 12 dBi average
- Feed power handling:
  - 500 W CW (1 to 2 GHz)
  - 200 W CW (2 to 3 GHz)
- Rugged construction

## PRODUCT APPLICATIONS:

- Wideband signal interception
- Covers the GSM-800, 900, 1800, 1900 and 3G frequency bands

## PRODUCT DESCRIPTION:

This directional log-periodic dipole array (LPDA) is primarily designed for high-power transmitting applications. It covers a frequency band of 800 to 3000 MHz with an average gain of 12 dBi. The antenna is supplied with hardware to mount onto a 60 mm mast.

The antenna consists of two high gain log-periodic antennas in a common radome. The antennas are connected in phase using a power divider. This allows high gain within a relatively small radome.

# High-Power LPDA Antenna Marine Version


800 – 3000 MHz

Product Code: LPDA-A0105


VERSION: 1.2

## VSWR AND GAIN GRAPHS:

### Typical VSWR:



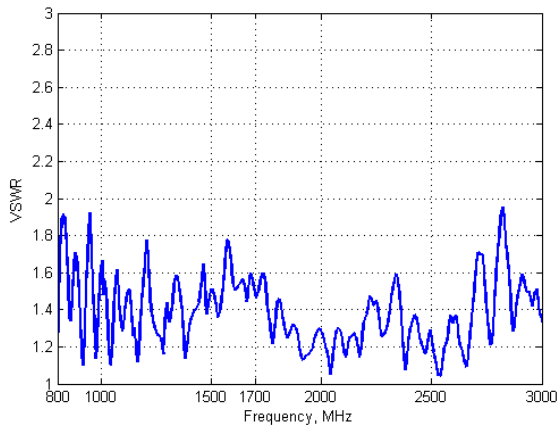


### GAIN:

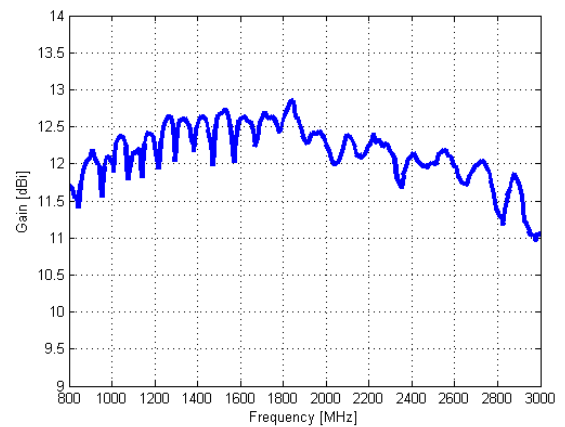

## PATTERNS:

### Radiation patterns (E-plane):

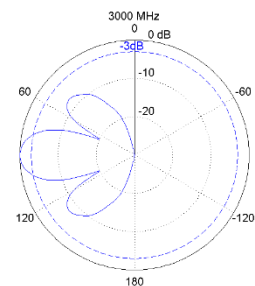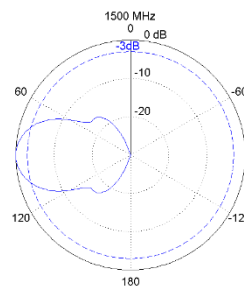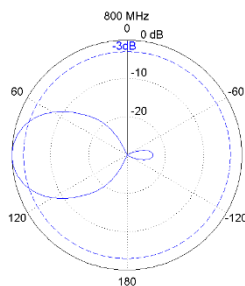

### Radiation patterns (H-plane):

